





Architektur 38/86 k lifting doors (easy-lift)

State: 23.01.2014





BRUNNER[®]
made in germany

Dimension sheet | **Architektur 38/86 k lifting doors (easy-lift)**

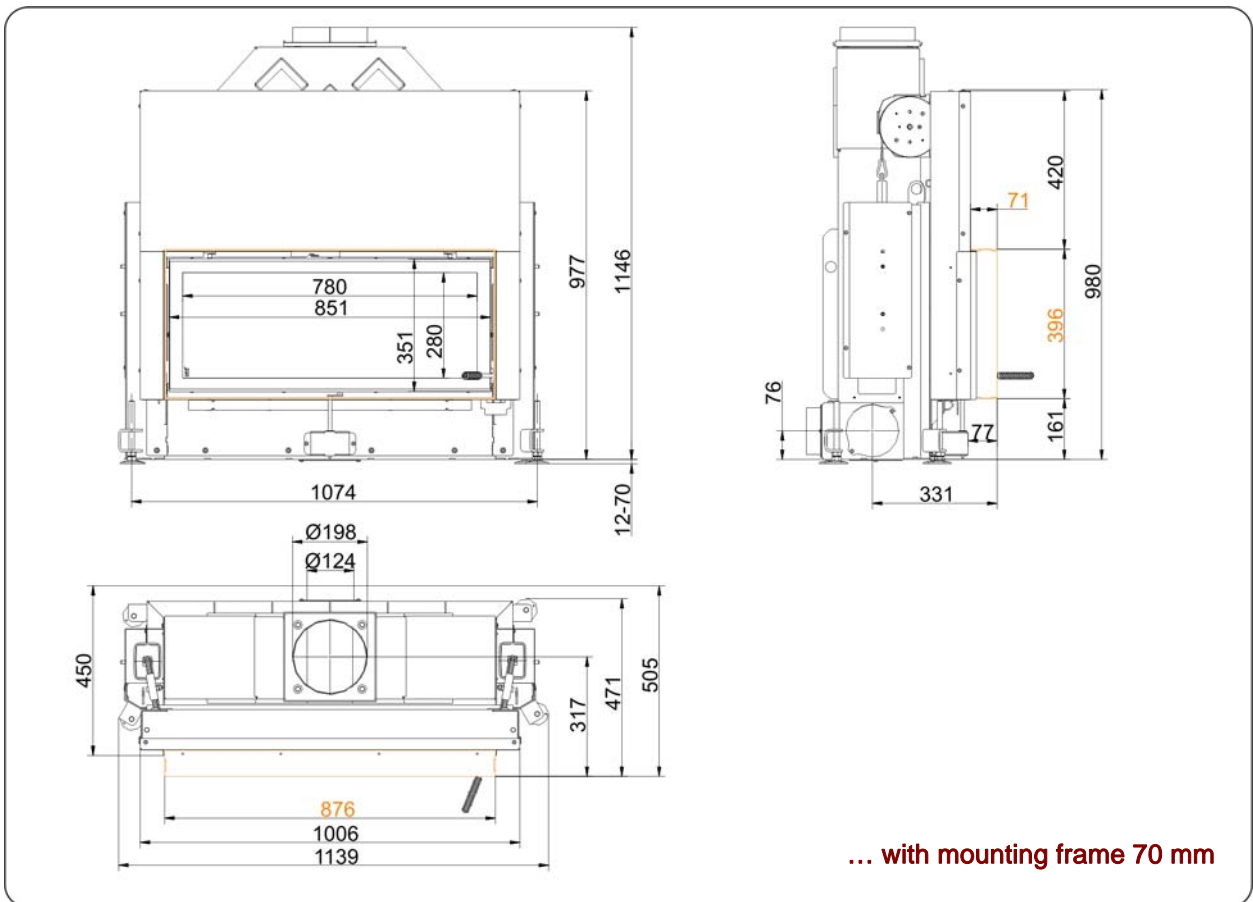
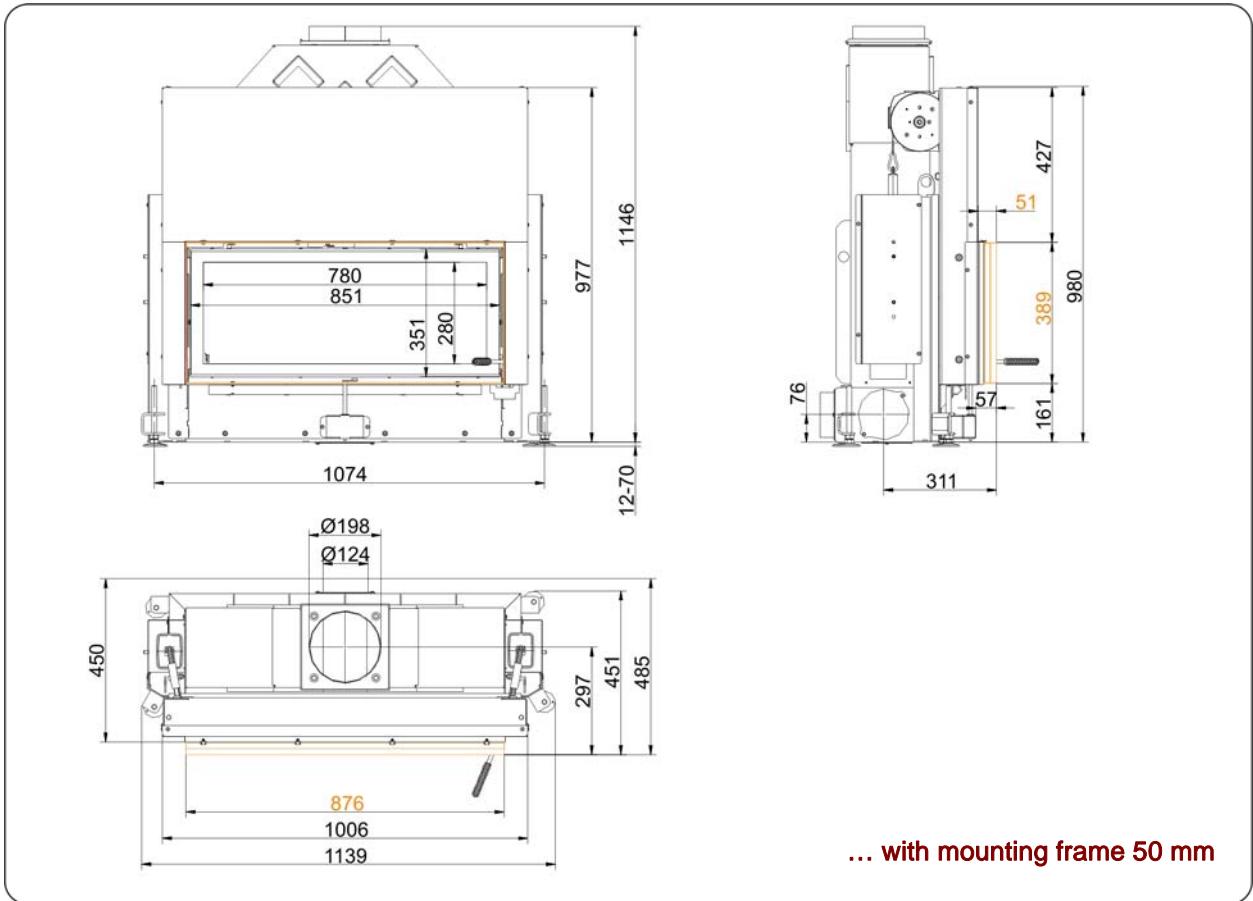


Dimension sheet | **Architektur 38/86 k lifting doors (easy-lift)**

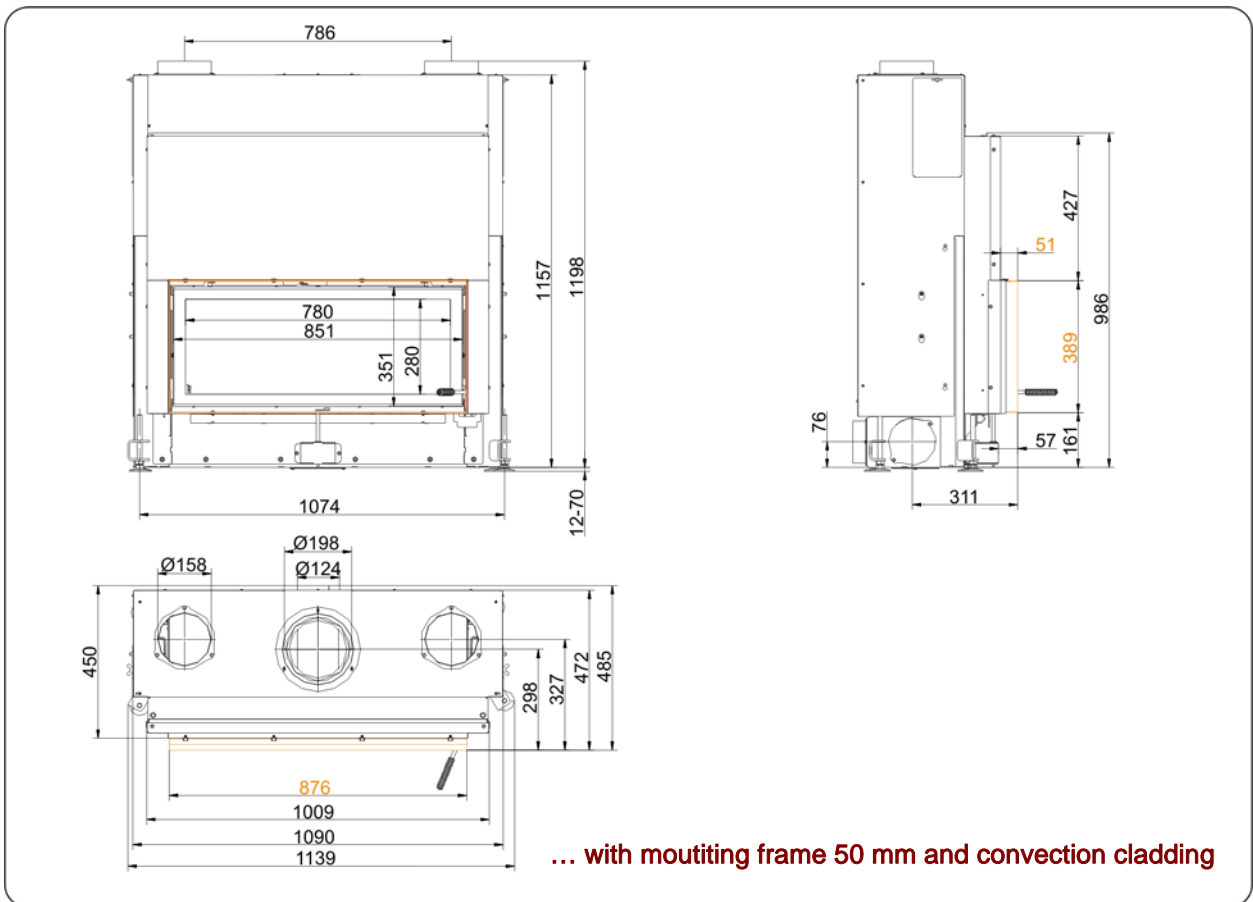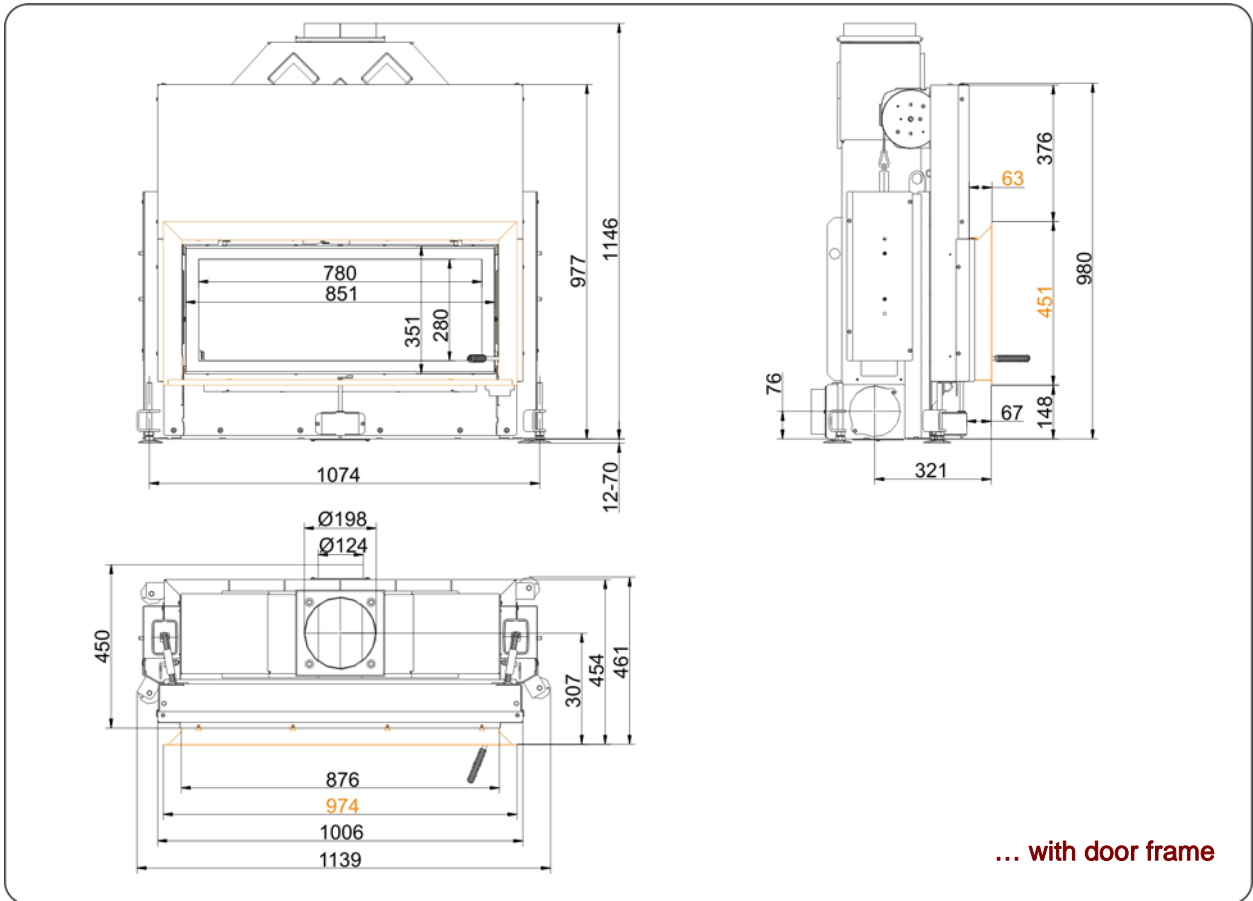

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
 Frames / front versions are marked colored.

Dimension sheet | **Architektur 38/86 k lifting doors (easy-lift)**

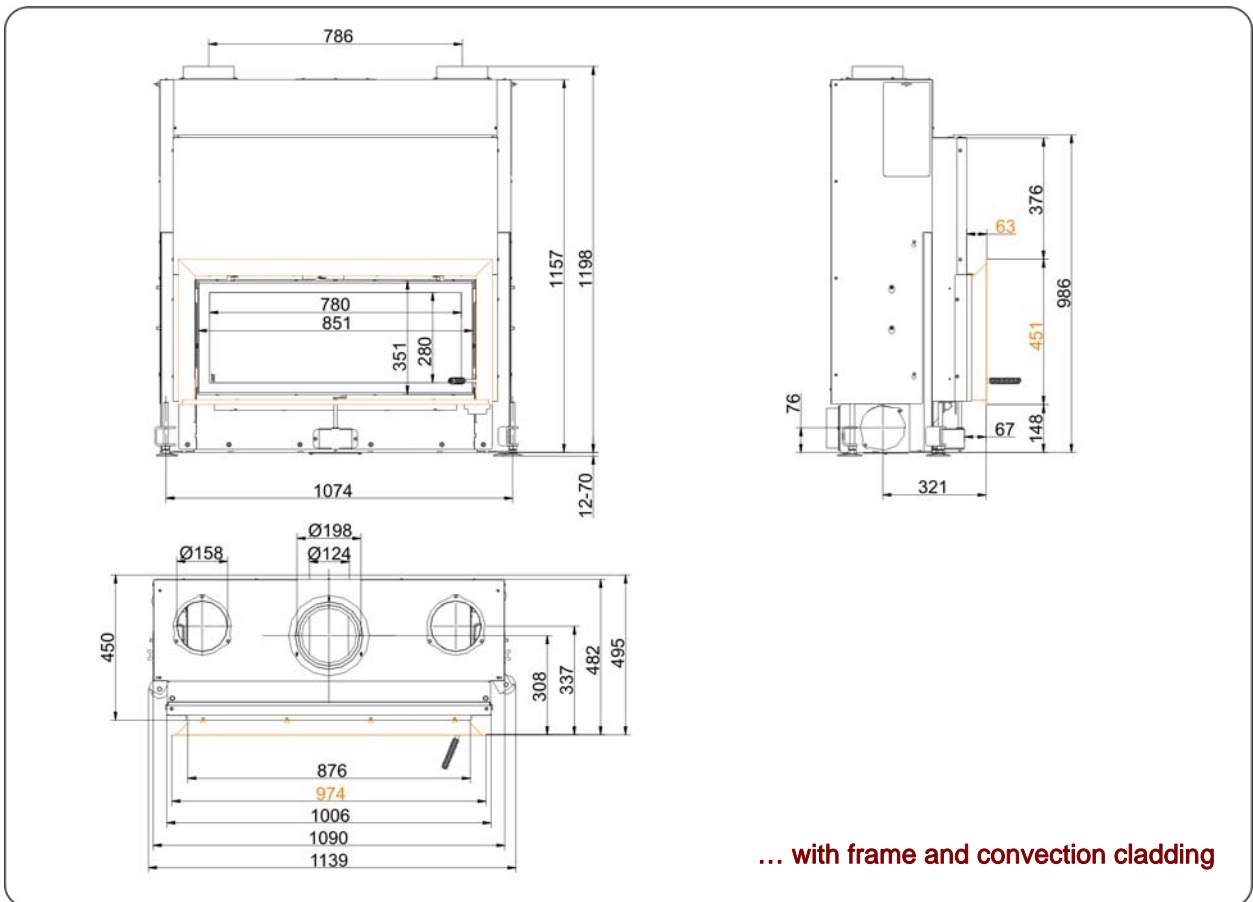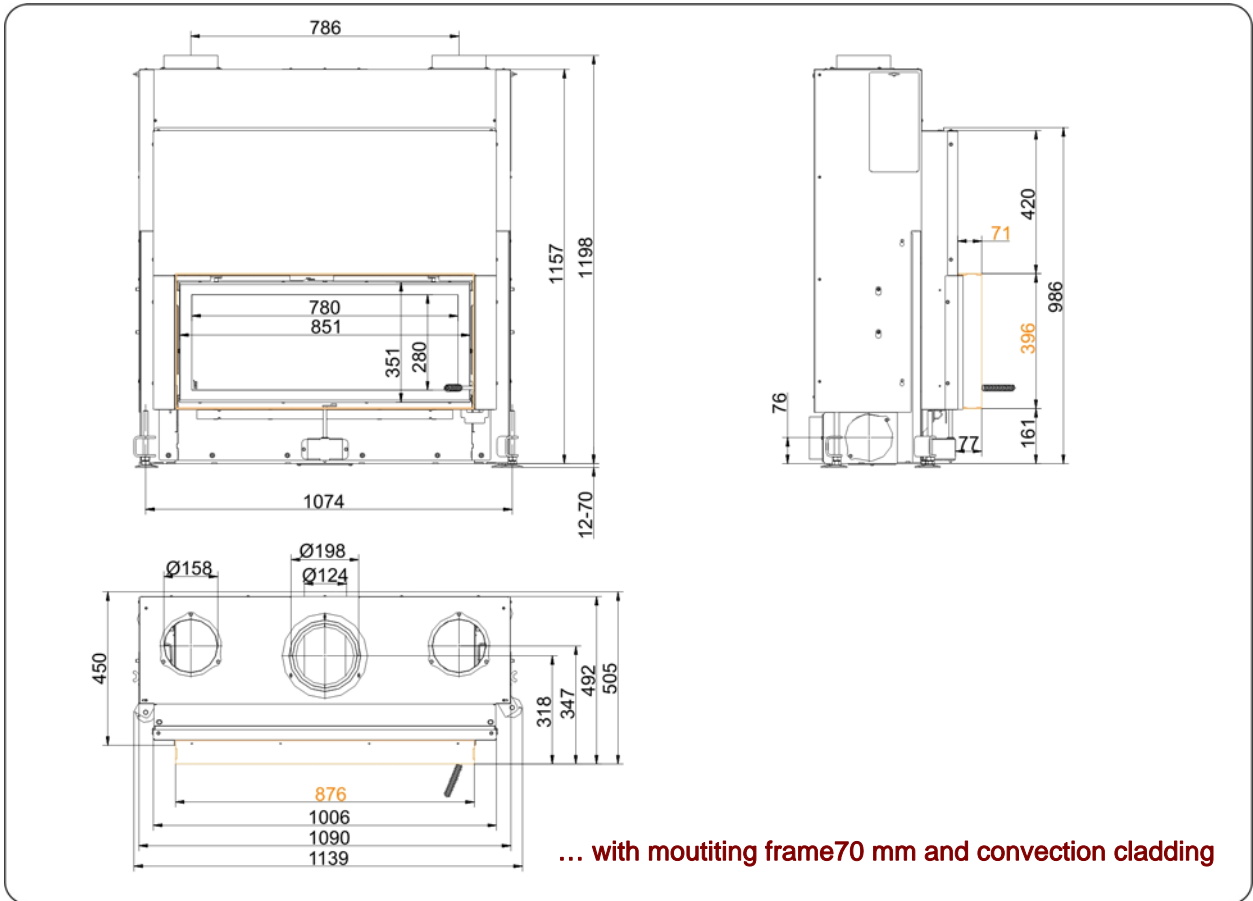

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
 Frames / front versions are marked colored.

Planning and installation

Architektur 38/86 k

Tested according to	EN 13229 W	EN 13229 W
Values measured at	nominal load	open door
Suitable for all construction types according to rules	OK	

Data for functional demonstration

Rated heat power	kW	8	-
Firewood consumption	kg/h	2,5	2,5
Combustion performance	kW	10	10
Flue gas mass flow	g/s	7	60
Outlet temperature (before heating surface)	°C	-	-
Flue gas temperature after			
attached steel smoke hood	°C	300	115
adjoining cast iron radiator (GNF10)	°C	-	-
accumulation rings (MAS) ¹⁾	°C	-	-
adjoining ceramic accumulator ²⁾	°C	-	-
accumulation stones (MSS)	°C	-	-
water boiler	°C	-	-
Necessary supply pressure	Pa	12	6
Combustion air consumption	m ³ /h	22	200
Combustion air connection Ø	mm	125	-

Heat distribution

Insert / heating surface	%	30 / 30	- / -
Glass (single / double)	%	40 / -	- / -
Boiler	%	-	-

Cross-section of gratings for max. warm air power

Supply air	cm ²	1200	-
Warm air	cm ²	1200	-

Minimal oven surface for closed construction type

Surface giving off heat	m ²	5,0	-
-------------------------	----------------	-----	---

Space inside oven chamber without / with convection cladding ⁴⁾

Distance to oven chamber wall	cm	8 / 3	8 / 3
Distance to floor	cm	-	-

Heat insulation without / with ³⁾ air gratings / with convection cladding ⁴⁾

Wall	cm	16 / 12	16 / 12
Floor	cm	0	0
Ceiling	cm	28 / 20	28 / 20
Insulation of additional fire door DHT	cm	-	-
Brick lining of protected walls	cm	10	10

Weight

Fireplace + burning chamber	kg	160 + 55	
-----------------------------	----	----------	--

meets requirement limit values for

Germany / Austria / Switzerland / Norway	1.BImSchV (Stufe 2) / 15a BVG / LRV / NS 3059
--	---

- 1) Throttle flap recommended
- 2) Approximate value, must be calculated eventually
- 3) Values with air gratings, stove casing is heat conducting
- 4) at thermal insulation with ventilation (see assembly instructions)

Ulrich Brunner GmbH
Zellhuber Ring 17 -18
D-84307 Eggenfelden
Phone: +49 / (0)87 21 / 7 71-0
Fax: +49 / (0)87 21 / 7 71-100
info@brunner.eu | www.brunner.eu



BRUNNER products are offered and sold only by qualified dealers and service centres.
Subject to technical and assortment changes. Errors excepted. (01/14)